

# AlGaAs Infrared Laser Diode

ADL-85501TL

6-2D-LD85-005\_Rev.00

## 850nm 50mW 5.6 φ TO-Type Laser Diode

### • Features


1. Low operation current
2. Cost effective

### • Applications

1. Bar-code scanner
2. Laser printer
3. Military

### • Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	$P_O$	CW	50	mW
Reverse voltage (LD)	$V_{RL}$	-	3.5	V
Reverse voltage (PD)	$V_{RD}$	-	30	V
Forward current (PD)	$I_{FD}$	-	10	mA
Case temperature	$T_C$	-	-10~+50	°C
Storage temperature	$T_S$	-	-40~+85	°C

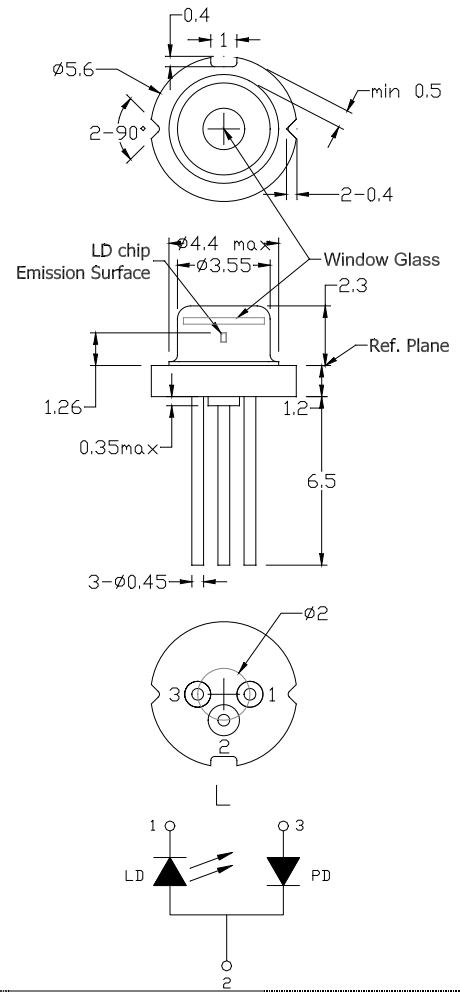

### • Electrical and optical characteristics ( $T_c=25^\circ\text{C}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	$\lambda$	830	845	850	nm	$P_o=50\text{mW}$
Threshold current	$I_{th}$	-	15	25	mA	
Operating current	$I_{op}$	-	75	95	mA	$P_o=50\text{mW}$
Operating voltage	$V_{op}$	-	1.8	2.4	V	$P_o=50\text{mW}$
Differential efficiency	$\eta$	0.7	0.8	1.0	mW/mA	$P_o=40\text{-}50\text{mW}$
Monitor current	$I_m$	0.2	0.5	1.0	mA	$P_o=50\text{mW}, V_{RD}=0\text{V}$
Parallel divergence angle	$\theta_{  }$	9	12	15	degree	$P_o=50\text{mW}$
Perpendicular divergence angle	$\theta_{\perp}$	26	30	35	degree	
Parallel FFP deviation angle	$\Delta\theta_{  }$	-3	-	+3	deg	
Perpendicular FFP deviation angle	$\Delta\theta_{\perp}$	-3	-	+3	deg	
Emission point accuracy	$\Delta x \Delta y$	-80	-	+80	um	
	$\Delta Z$	-40	-	+40	um	

### • Precautions

- \* Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- \* Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- \* Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- \* Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- \* No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- \* Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

\* For reference only. Contents above are subject to change without notice.

### Contact

For US, Canada Ayase America Inc.  
For EU Ayase Europe GmbH  
For Japan Ayase Co., Ltd.

e-mail: [info@ayaseamerica.com](mailto:info@ayaseamerica.com)  
e-mail: [info@ayase-europe.de](mailto:info@ayase-europe.de)  
e-mail: [info@ayasecorporation.com](mailto:info@ayasecorporation.com)







+1-408-988-5277  
+49-0-6122-533-811  
+81-45-532-9501



# AlGaAs Infrared Laser Diode

ADL-85501TL

6-2D-LD85-005\_Rev.00

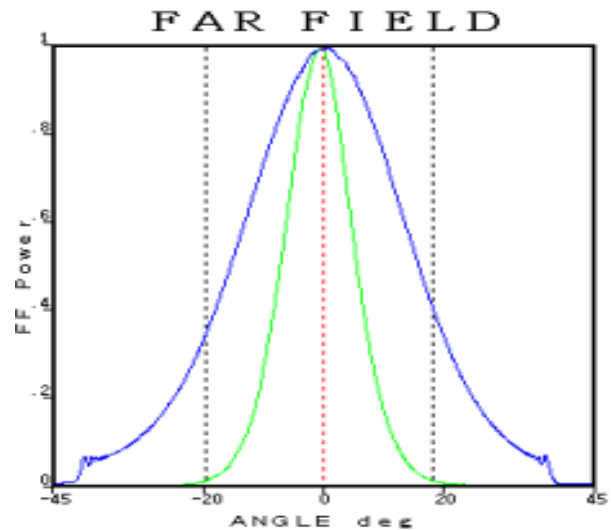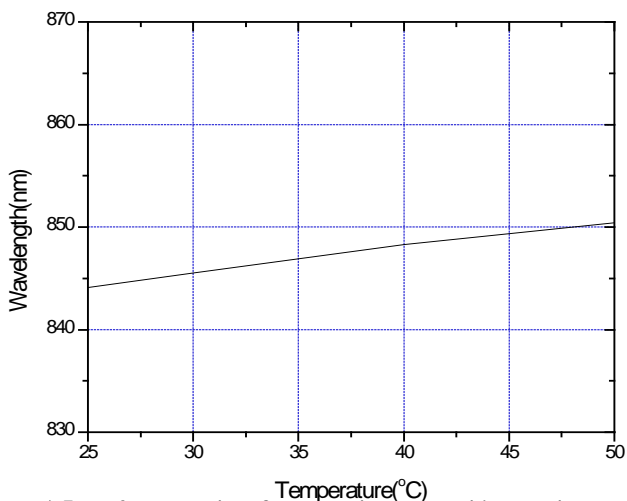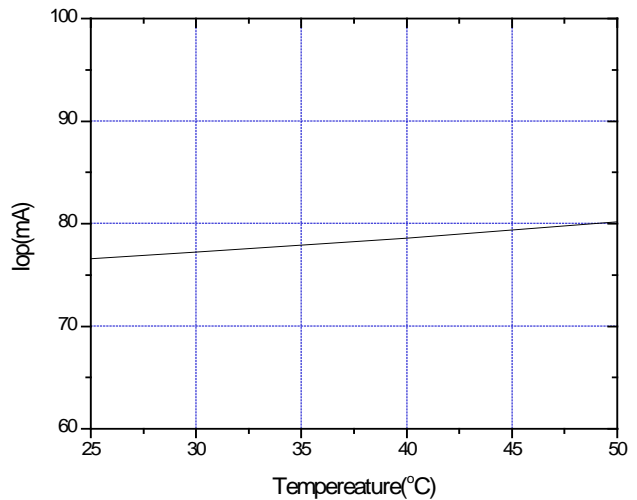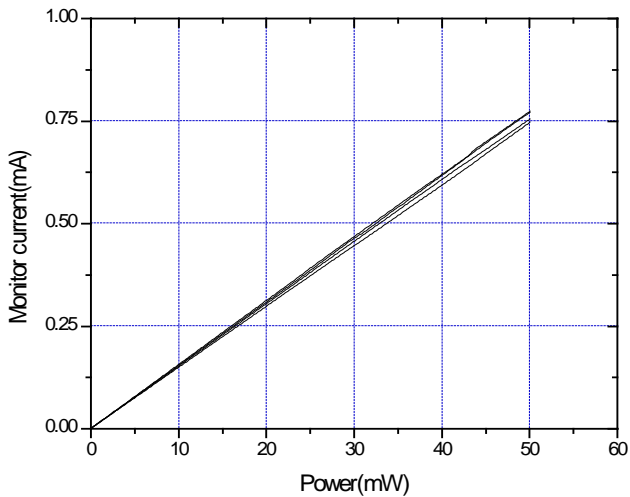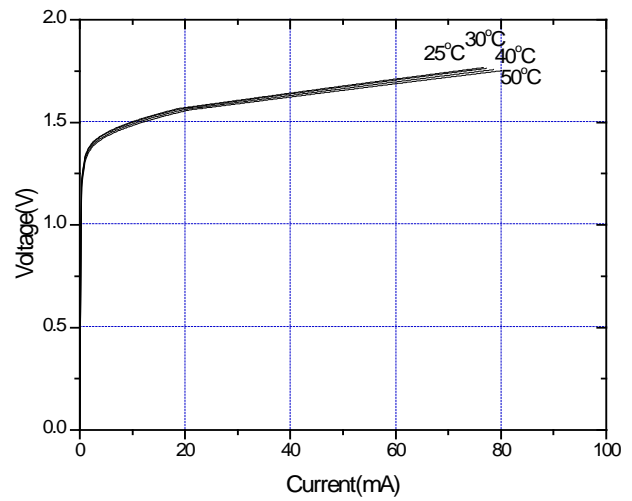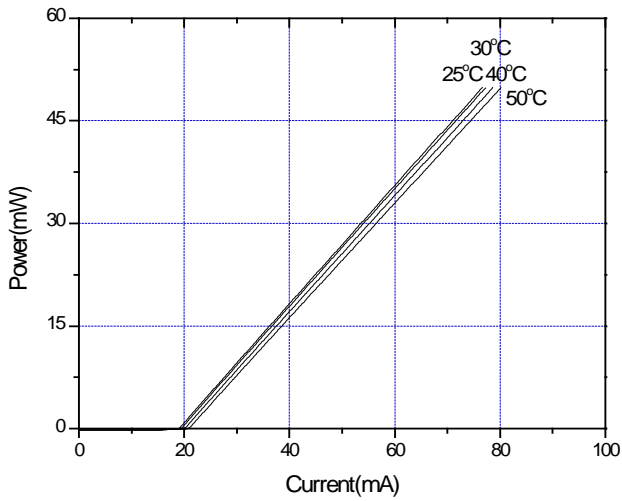

\* For reference only. Contents above are subject to change without notice.

Contact

For US, Canada  
For EU  
For Japan

Ayase America Inc.  
Ayase Europe GmbH  
Ayase Co., Ltd.

e-mail: [info@ayaseamerica.com](mailto:info@ayaseamerica.com)  
e-mail: [info@ayase-europe.de](mailto:info@ayase-europe.de)  
e-mail: [info@ayasecorporation.com](mailto:info@ayasecorporation.com)

+1-408-988-5277  
+49-0-6122-533-811  
+81-45-532-9501

